



7-201 Hinge Pr01 180° Stainless Steel



Avantages

- For nested doors.
- Hinge visible.
- RH / LH application.
- 180° Opening angle.
- Vibration-proof.
- Vandalism safety due to both sides welded, hinge pin not visible.
- Fire protection tested with E60 classification according to DIN EN 45545-3.

Materials

- **Hinge parts and pin:** AISI 316


Notes

Fastening with countersunk screws M5, M6 or M8 to DIN 7991



Hinge

	Part Number	Dimension	Pin version	Installation type	Delivery Unit
a)	218-9309.00-00000	40 x 42	welded	screw-on	10 pcs.
b)	218-9310.00-00000	50 x 50	welded	screw-on	10 pcs.
c)	218-9311.00-00000	60 x 63	welded	screw-on	10 pcs.

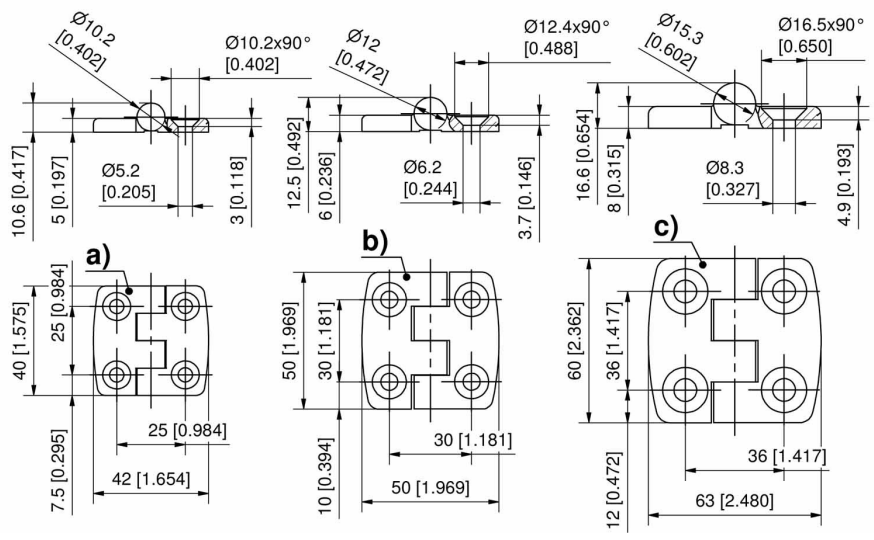



7-201.01 Hinge Pr01 with Stud 180° Stainless Steel



Avantages

- For nested doors.
- Hinge visible.
- RH / LH application.
- 180° Opening angle.
- With welded stud.
- Both sides welded pin.
- Vandalism safety.

Materials

- **Hinge:** AISI 316



Hinge

Part Number	Dimension	Fastening type	max. tightening torque	Pin version	Installation type	Delivery Unit
218-9314.00-00000	40 x 42	M5	2.5 Nm	welded	screw-on	10 pcs.
218-9315.00-00000	50 x 50	M6	3.5 Nm	welded	screw-on	10 pcs.
218-9316.00-00000	60 x 63	M8	8.4 Nm	welded	screw-on	10 pcs.

